


SLAYER<sup>®</sup>  
ESPRESSO MACHINES

ESPRESSO<sup>V3</sup>

## THE ULTIMATE COFFEE PROFESSIONAL'S TOOL

The SLAYER Espresso v3 provides flow rate control via patented Needle Valve technology, allowing the barista to extract espresso that is unparalleled in flavor and mouthfeel.

It comes equipped with an independent brew tank per group for impeccable temperature stability and a dedicated tank for unlimited steam capacity. The SLAYER Espresso is unmatched in innovation and capabilities—it is the dream machine.

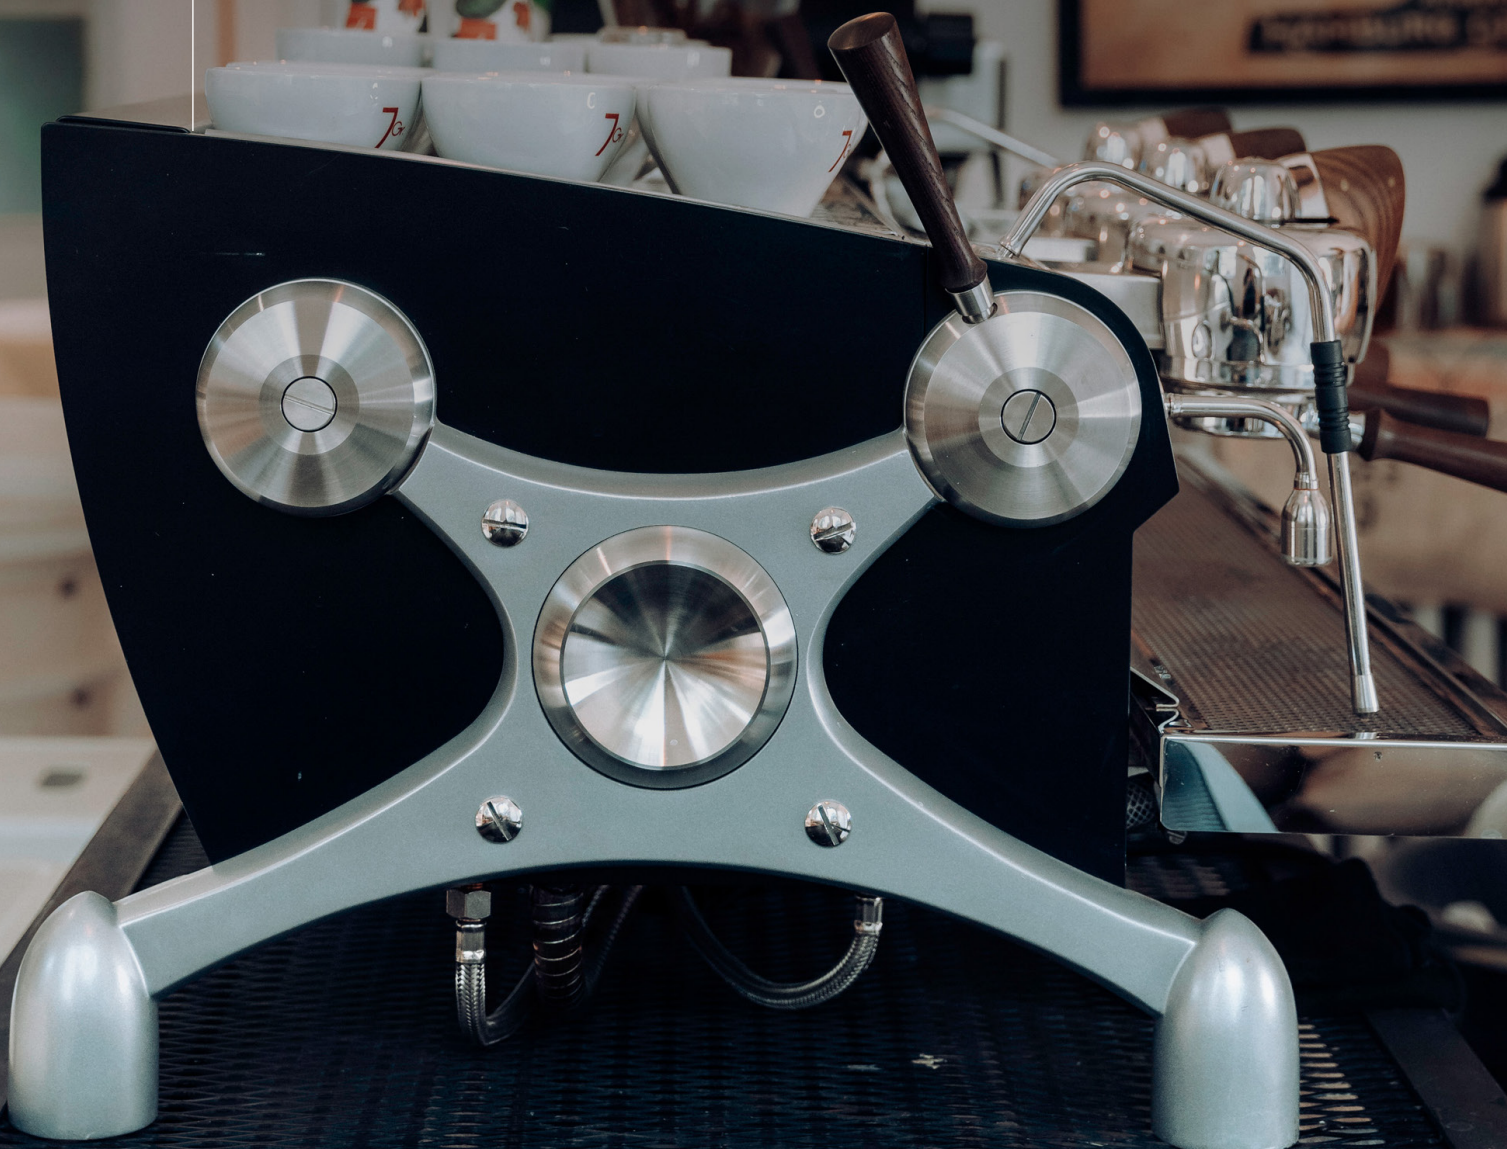

# SLAYER ESPRESSO V3

SLAYER  
ESPRESSO MACHINES



## DESCRIPTION

The SLAYER Espresso v3 in its Standard Configuration features silver powder-coated X's, black powder-coated rear and side body panels and actuators finished in European Ash.

The SLAYER Espresso line is massively customizable. Explore alternative finishes and wood options to make your machine unique and truly yours

## ESSENTIAL FEATURES

### PATENTED NEEDLE VALVE

Grind finer and perfect your flavor profile with a restricted water flow rate that produces espresso unlike any other machine

### BREW GROUP ACTUATORS

3-position actuator allows you to shift between flow rates effortlessly—this grouphead is rated at 1 million cycles

### PROGRAMMABLE PRE-BREW TIMER

Quickly and easily shift between Pre-Brew and Full Flow by toggling on an adjustable timer

### INCREDIBLE TEMPERATURE STABILITY

Supplemental Pre-Heat Tank means you've got a near-infinite supply of temperature stable water and steam

### INDEPENDENT BREW & STEAM TANKS


Dedicated tanks at each group, and a dedicated tank for steam maintain optimum temperature stability

### INTENTIONAL DESIGN

Keep an eye on your extraction with the conveniently located shot mirror, stay engaged with customers over the low profile of the machine, and enjoy the brewing process with ergonomic features


### HANDCRAFTED & CUSTOMIZABLE

Built with both form and function in mind—the choice is yours on wood type, panel color, metal finishes, cup rails

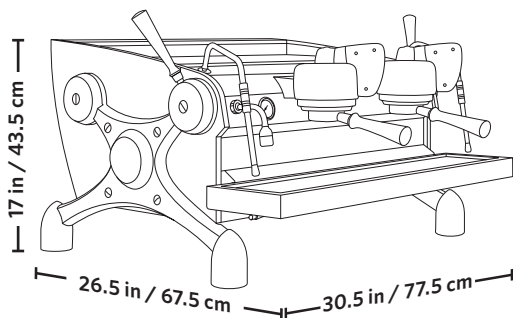

### 2 GROUP SPECIFICATIONS

Weight	220 lb / 100 kg
Brew Tank	1.7 L, 600 W (x2)
Pre-heat Tank	3.3L, 1000 W
Steam Tank	7.4 L, 3,500 W
Single-Phase	220—240V; 50/60Hz; 26—29A; 5.7—6.9kW
Three-Phase	380—415V; 50/60Hz; 17—18A; 6.3—7.5kW

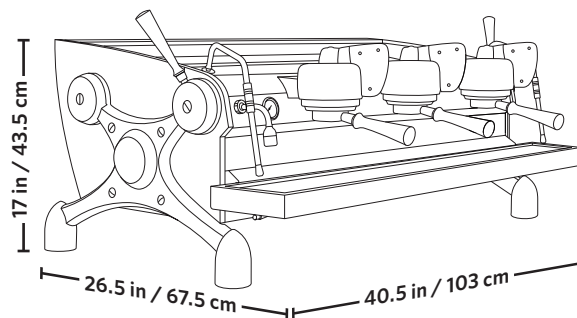

### 3 GROUP SPECIFICATIONS

Weight	305 lb / 139 kg
Brew Tank	1.7 L, 600 W (x3)
Pre-heat Tank	5.4 L, 1000 W
Steam Tank	12 L, 4,500 W
Single-Phase	220—240V; 50/60Hz; 33—36A; 7.3—8.7kW
Three-Phase	380—415V; 50/60Hz; 19—21A; 7.3—8.7kW