

SLAYER[®]
ESPRESSO MACHINES

STEAM^{LP}

THE ALL-ROUNDER: FLAVOR PROFILING, FOR EVERYONE.

The SLAYER Steam LP is a dream come true for those seeking incredible control and accuracy through pressure profiling and repeatability functions. Easily extract delicious espresso every time with programmable pre-infusion, post-infusion, and volumetric output settings.

You'll experience the best of both worlds with the Steam LP's ability to work in both manual and volumetric modes. Easily pull manual shots while shifting between pressures to 'record' your favorite shot and 'playback' all day.

The perfect tool to maximize your coffee experience on every level is here!





Mirror



Turquoise Blue



Glossy White



Bone Beige



Matte Black

DESCRIPTION

The SLAYER Steam LP in its Standard Configuration features ink-black wings, Onyx Duratex™ actuators, Soft Touch™ portafilters, and mirror-polished steel body panels.

The Steam LP is also available with chrome plated and polished wings, Sapele wood actuators and your choice of 4 body panel colors: turquoise, glossy white, bone beige, and matte black.

ESSENTIAL FEATURES

VARIABLE PRESSURE

Manually shift between a regulated low-pressure and a traditional pump-pressure easily with the brew actuator

BARISTA DASHBOARD PER GROUP

Easy to operate, program and fine tune your machine from individual screens per grouphead

CLEAN INSTALLATION

Cantilevered 'Wings' support the machine and also hide unsightly power and drain cables for a clean installation

INTUITIVE VOLUMETRIC INTERFACE

Quickly and easily "record" your last manual shot and "replay" it all day

INDIVIDUAL BREW TANKS WITH PID CONTROL

Dedicated tanks at each group and a dedicated tank for steam to maintain optimum temperature stability

STEAM WANDS FEATURE ELECTRONIC VALVES


Reliable, low maintenance valves don't need rebuilding like mechanical valves

QUICK CALIBRATION

Scroll and adjust values to make small changes or set up the full brew recipe


BIG ADJUSTABLE DRIP TRAY

Easily stage drinks with a massive workspace on an adjustable height drip tray

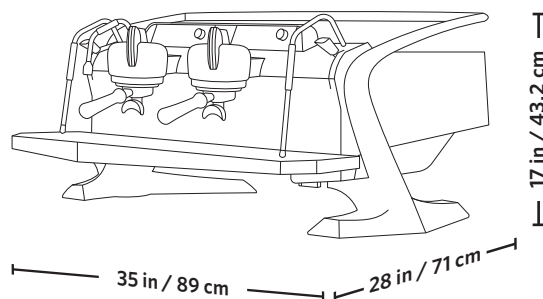

2 GROUP SPECIFICATIONS

Weight	220 lb / 100 kg
Brew Tank	1.7 L, 600 W (x2)
Steam Tank	7.4 L, 3,500 W
Single-Phase	220—240V; 50/60Hz; 21—23A; 4.7—5.6kW
Three-Phase	380—415V; 50/60Hz; 13—14A; 4.9—5.7kW

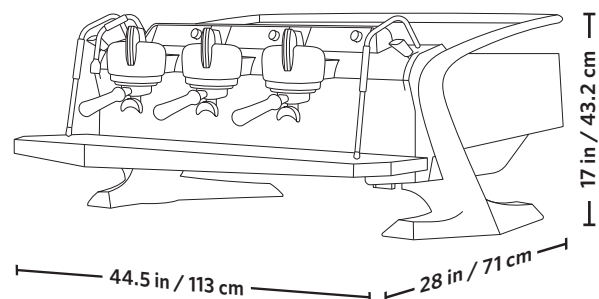

3 GROUP SPECIFICATIONS

Weight	305 lb / 139 kg
Brew Tank	1.7 L, 600 W (x3)
Steam Tank	12 L, 4,500 W
Single-Phase	220—240V; 50/60Hz; 29—32A; 6.3—7.6kW
Three-Phase	380—415V; 50/60Hz; 15—16A; 5.8—6.5kW